

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number  
**WO 01/26532 A1**

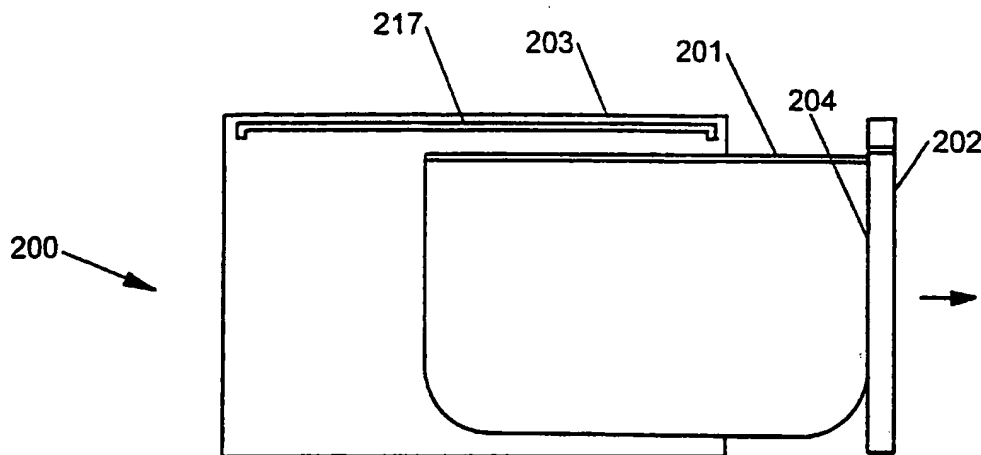
- (51) International Patent Classification<sup>7</sup>: A47L 15/00, 15/42, F16J 15/32 (74) Agent: CALHOUN, Douglas, C.; A J Park, Huddart Parker Building, 1 Post Office Square, Wellington (NZ).
- (21) International Application Number: PCT/NZ00/00193 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 5 October 2000 (05.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 500167 8 October 1999 (08.10.1999) NZ
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): FISHER & PAYKEL LIMITED [NZ/NZ]; 78 Springs Road, East Tamaki, Auckland (NZ).

**Published:**

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DISHWASHER



(57) Abstract: A dishwasher (200) is disclosed which is suitable for mounting within a cavity under a bench. The dishwasher is chassis less and includes no outer wrapper or cabinet and as such is mounted directly to the cavity. Also disclosed are a number of embodiments relating to mechanisms for closing the lid (217) on the retractable drawer wash system and various methods for sealing the lid onto the wash drawer.

WO 01/26532 A1

**“DISHWASHER”****TECHNICAL FIELD**

5 This invention relates to dishwashers and in particular but not solely to a dishwasher of the type disclosed in the applicant's international patent specification WO 93/12706.

**BACKGROUND ART**

10 The dishwasher of WO 93/12706 has a form generally indicated in Figures 1 and 2 and installation options as shown in Figures 4 to 6. The dishwasher disclosed in WO 93/12706 differs from conventional dishwashers in that a wash chamber and associated wash system is slidably mounted in the form of a drawer within a cabinet and the chamber is withdrawn horizontally to allow loading through the open top of the chamber. When the chamber is retracted an associated lid sealably closes off the top of the chamber to contain wash liquid in operation. The dishwasher of WO 93/12706 includes a cabinet or wrapper 203 wherein which  
15 all working components are housed. The cabinet acts as a chassis and a high finish wrapper. In use dishwashers are usually mounted in kitchen joinery and rarely used in a free-standing mode. When so used the presence of a high finish wrapper is redundant and constitutes an unnecessary manufacturing cost.

20 In WO 93/12706 the wash chamber lid is of unitary construction movably retained in the top of the cabinet and engaged by the wash chamber on retraction to move down onto the top of the wash chamber using a parallelogram linkage and cam mechanism. In practice it has been found that other types of wash chamber covers may be satisfactory and may have better production economics.

25 WO 98/33426 discloses a dishwasher similar to that depicted in Figures 1-6. In one preferred form it uses an inflatable gasket to seal the drawer when it is retracted into the cabinet. However, this may affect product reliability and impact on user satisfaction. The gasket inflation and deflation time may inconvenience the user with respect to the delays in opening the drawer mid-cycle and the rubber gasket may deteriorate over time creating maintenance problems.

30

**DISCLOSURE OF INVENTION**

It is an object of the present invention to provide a dishwasher of the type described which goes some way towards overcoming the above-mentioned disadvantages, or which will at least provide the public with a useful choice.

35 Accordingly in a first aspect the present invention consists in a washing appliance adapted to be mounted in a cavity comprising:

- (a) transport means adapted to mount to at least one inner face of said cavity,
- (b) a wash system slidably mounted to said transport means whereby in use said

wash system may be withdrawn horizontally out of said cavity for access thereto, said wash system including:

(i) an open top wash chamber adapted to accommodate items to be washed and within which wash liquid is circulated, said wash chamber having a top peripheral rim,

5 (ii) means for introducing and circulating wash liquid within said chamber,

(iii) means for evacuating wash liquid from said chamber,

(c) a wash chamber closure adapted to be mounted within said cavity, which closure covers the open top of said wash chamber on retraction of the wash chamber into said cavity, and

10 (d) said closure having peripheral means which cooperate with the top of said chamber in the vicinity of said rim thereby preventing the egress of wash liquid from the wash chamber, when it is retracted into said cabinet.

Preferably, said transport means includes fastening means adapted to attach to at least one inner face of said cavity.

15 Preferably, said closure is a rigid lid.

Preferably, said peripheral means comprise a sealing member disposed about the periphery of the under side of said lid to inter-engage with the rim of said chamber when said wash chamber is retracted into said cabinet.

Preferably, said washing appliance further comprises a cam arrangement including a cam surface adapted to connect to a stationary point within said cavity, a cam-follower connected to said closure and adapted to interact with said cam surface, and an elastically deformable member adapted to be compressed between said cam-follower and a stationary point within said cavity, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber within said cabinet and on initial withdrawal of said wash chamber from within said cavity with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

Alternatively, said washing appliance further comprises a linkage arrangement including at least one hinged link member, one end of each member being hingably connected to said transport means and the other end of each member being hingably connected to said closure, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full

retraction of said wash chamber within said cabinet and on initial withdrawal of said wash chamber from within said cavity with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

5           Alternatively, said lid is mounted in a fixed position under the top of the cabinet aligned so as to cover the top of the wash chamber when the latter is retracted, said wash chamber rim is uniformly inclined to be higher at the front than at the back, said lid has a peripheral flange which is correspondingly inclined in depth to be higher at the back than at the front, a resilient sealing member is disposed around the periphery of the underside of said lid, and the vertical  
10           location of said lid is such that when said wash chamber is fully retracted the sealing member is engaged and compressed by the rim of said wash chamber.

          Preferably, said closure is a flexible member which is extended on retraction of said wash chamber to cover the open top of said chamber and is retracted on withdrawal of said chamber to uncover the open top of said chamber.

15           Preferably, said flexible member is a flexible sheet fastened at one end to a distal portion of said rim and fixed on a spring-loaded roller at the other end, said roller mounted in the top of said cabinet near the front opening in the cabinet and above a proximal portion of said rim, said roller taking up substantially all of the area of said flexible member when the chamber is withdrawn.

20           Preferably, said flexible member is of concertina configuration and is fastened at one end to a distal portion of said rim and fixed at the other end to the top of the front opening of said cabinet.

          In a second aspect the invention consists in a washing appliance comprising:

25           (a) a wash system adapted to be slidable mounted in such a manner that it may be withdrawn horizontally for access thereto, said wash system including:

          (i) an open top wash chamber adapted to accommodate items to be washed and within which wash liquid is circulated, said wash chamber having a top peripheral rim,

          (ii) means for introducing and circulating wash liquid within said chamber,

30           (iii) means for evacuating wash liquid from said chamber,

          (b) a wash chamber closure, and

          (c) a cam arrangement including a cam surface adapted to connect to a stationary point, a cam-follower connected to said closure and adapted to interact with said cam surface, and an elastically deformable member adapted to be compressed between said cam-follower  
35           and a stationary point, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and

complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber within said cabinet and on initial withdrawal of said wash chamber with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

Preferably, when said chamber is fully retracted the entire downward force on said closure is provided by said elastically deformable member.

Preferably, said elastically deformable member is a torsional spring.

In a third aspect the invention consists in a washing appliance comprising:

(a) a wash system adapted to be slidable mounted in such a manner that it may be withdrawn horizontally for access thereto, said wash system including:

(i) an open top wash chamber adapted to accommodate items to be washed and within which wash liquid is circulated, said wash chamber having a top peripheral rim,

(ii) means for introducing and circulating wash liquid within said chamber,

(iii) means for evacuating wash liquid from said chamber,

(b) a wash chamber closure, and

(c) a linkage arrangement including at least one hinged link member, one end of each member being adapted to hingably connect to a stationary pivot point and the other end of each member being hingably connected to said closure, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber and on initial withdrawal of said wash chamber with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

In a forth aspect the present invention consists in a gasket for a dishwasher including at least one slidable open top wash chamber and a wash chamber closure for each respective wash chamber, said gasket comprising:

(a) a first downward facing flexible flange having a first distal edge and a first proximate edge, said proximate edge attached to the bottom surface of said closure around the periphery thereof, at a angle of between  $0^{\circ}$  and  $90^{\circ}$ , with respect to said bottom surface, and

(b) a second downward facing flexible flange having a second distal edge and a second proximate edge, said second proximate edge attached to the first distal edge of said first flange at a second angle of between  $90^{\circ}$  and  $180^{\circ}$  concurrent with said first angle,

wherein in use when said closure is engaged with the opening of said wash chamber,

said first flange and said second flange deform such that when said closure is fully engaged with said opening, said first distal edge and said second distal edge bear substantial similar loads.

Preferably, said first angle is  $45^{\circ}$ .

5 Preferably, said second angle is  $135^{\circ}$ .

Preferably, said gasket is "L" shaped in cross-section.

To those skilled in the art to which the invention relates, many changes in construction and widely differing embodiments and applications of the invention will suggest themselves without departing from the scope of the invention as defined in the appended claims. The disclosures and the descriptions herein are purely illustrative and are not intended to be in any  
10 sense limiting.

The invention consists in the foregoing and also envisages constructions of which the following gives examples.

## 15 BRIEF DESCRIPTION OF THE DRAWINGS

One preferred form of the present invention will now be described with reference to the accompanying drawings in which;

Figure 1 shows in diagrammatic form a dishwasher of the present invention,

20 Figures 2 and 3 shows in diagrammatic form the dishwasher plumbing and wiring system with the wash chamber in the closed and open positions respectively,

Figures 4 to 6 show a selection of ways in which dishwashers of the type in WO 93/12706 and in the present specification may be mounted in a modular fashion in a kitchen installation,

25 Figure 7 shows a 'two drawer' single cabinet dishwasher according to the present invention,

Figure 8 shows the structural features of the cabinet of Figure 7,

Figure 9 is a front view of the further embodiment of the present invention showing the wash system mounted underneath a bench with the front of the drawer cutaway,

Figure 10 is a more detailed view of the wash system shown in Figure 9,

30 Figure 11 is a front view of an alternative embodiment of the present invention showing the cabinet lid being separately mounted with the front of the drawer being cutaway,

Figure 12 is a side view of the present invention with the drawer pulled out,

Figure 14 shows a further method of sealing an open topped wash chamber using a rigid lid,

35 Figure 15 shows a method of sealing an open topped wash chamber using a flexible closure member,

Figures 16 and 17 show an alternative method of sealing an open topped wash chamber

a flexible closure,

Figures 18 and 19 show diagrammatically a further method of sealing an open topped wash chamber with a rigid lid,

Figures 20 and 21 show in diagrammatic form a means of sealing an open top wash chamber with a rigid lid using an inflatable gasket,

Figure 22 shows a partial section through a dishwasher incorporating the sealing method shown in Figures 20 and 21,

Figures 23 and 24 show an alternative method of sealing an open topped wash chamber with a rigid lid,

Figures 25 and 26 show diagrammatically a further method of sealing an open topped wash chamber with a rigid lid,

Figure 27 is a side view of the closure opening mechanism using a hinged arm,

Figure 28 is a detailed view of the linkage arrangement in Figure 27 in isolation,

Figure 29 is a side view of the lid gasket, in isolation,

Figure 30 is a side view of the closure opening mechanism using a roller and cam,

Figure 31 is a detailed view of the linkage arrangement in Figure 30 in isolation, with the wash chamber retracted,

Figure 32 is a detailed view of the linkage arrangement in Figure 30 in isolation, with the wash chamber partially withdrawn,

Figure 38 shows a diagrammatic view of an alternative construction for closing a wash chamber when a fixed lid is used,

Figure 39 shows a diagrammatic view of an alternative construction for closing a wash chamber when a fixed lid is used by making use of a moveable seal support carrier,

Figure 40 shows a diagrammatic cross-section of a wash chamber and associated lid which is lowered to close the wash chamber by a stored spring energy system,

Figure 41 shows a partial isometric cross-section of the mechanism illustrated in Figure 40,

Figure 42 shows diagrammatically yet a further alternative closure system for a wash chamber using an endless belt,

Figures 43 and 44 show supplementary sealing members for a wash chamber closure,

Figures 45 to 47 show diagrammatically a wash chamber closure system employing a spring loaded cam and cam follower lid lowering mechanism.

#### **MODES FOR CARRYING OUT THE INVENTION**

The present dishwasher 200 is of the type illustrated in Figure 1. A wash chamber 201 (with all wash system components) fitted with a front panel 202 is slidably mounted within a cabinet 203 in a 'drawer' arrangement. The wash chamber has an open top and is withdrawn from the cabinet in the direction of the arrow to allow loading and unloading of dishes and is retracted into cabinet 203 during washing. The wash and drain systems are fitted within wash

chamber 201 including a motor and pumps. Flexible connecting wiring and plumbing 228 couple the wash chamber to the relevant terminations within the cabinet in the manner indicated in Figures 2 and 3. The dishwasher controller may be mounted in the cabinet or in the sliding wash system.

5           The dishwasher is usually constructed with a height dimension approximately half that of conventional front-loading domestic dishwashers. In this form it can be used alone or as one of a number, more usually one of a pair of such dishwashers. Figures 4 to 6 show installation concepts using one or two dishwashers using this modular concept. In Figure 4, two such dishwashers 200 are shown stacked one above the other under a sink bench 1 which will typically be between 850 and 900mm above floor level. In Figure 5 two dishwashers 200 are shown mounted one on either side of a sink forming part of the sink bench 1. In Figure 6 only a single dishwasher 200 is provided under a sink bench 1. Because of the reduced height dimension a dishwasher according to the invention could also be bench mounted.

10           From Figure 4 it can be seen that when two modular dishwasher units 200 are stacked one above the other the configuration is similar in external dimensions to conventional dishwashers. Two modular units 200 installed side by side immediately under a bench top as in Figure 5 offer the same capacity as a conventional dishwasher but avoid the inconvenience of a user having to bend down to reach the lower half of the dishwasher.

15           Some pair arrangements could be manufactured as such rather than pairing two individual modules at installation. For example the two dishwasher 'over and under' configuration shown in Figure 4 can be manufactured in a single external envelope or cabinet and provided for installation as a unitary machine. Such a two drawer machine is shown in Figure 7, comprising a single cabinet 203 which houses two drawer type wash chambers 202a and 202b. The drawer fronts are each provided with an aesthetically pleasing facia.

20           A two drawer machine of this type allows for considerable flexibility in operating modes. These include:

- 25           1. One module operating, or two modules operating simultaneously with a mixed dish load. With each module capable of accommodating the largest item of dish load, this concept offers an increased capacity for large items.
- 30           2. One or both modules operating, but not necessarily simultaneously, where each module has either lightly soiled or heavily soiled dish load, and the appropriate wash programme set to suit the individual module.
- 35           3. One module being gradually filled with soiled dishes, while the second module is being emptied only as its clean dish load is being reused. For reasons of hygiene this is not practical with single dishwashers
4. One module programmed for lightly soiled loads and the other module for heavily soiled loads.

5. One module switched on as soon as it has been filled with soiled dishes. That is, smaller loads may be efficiently washed.

#### Base Module

Whereas previous versions of drawer type dishwashers have included a cabinet and chassis the improvement that is the preferred embodiment of the present invention, shown in Figure 9 and 10, provides a dishwashing system which is directly fixed to joinery and does not include a cabinet or chassis. The base module 300 may be attached by any suitable fastening means 301 such as bolts or wood screws into the adjacent vertical members 302 inside the cavity 310. The base module 300 being thus restrained, when the wash chamber 308 is withdrawn, any racking forces will be borne by the vertical members 302 of the bench 304.

The wash chamber 308 is slidable in and out of the cavity 310 by means of sliding rails 306 integrated with the base module 300. In the preferred embodiment of the present invention, the base module 300 effectively comprises the mounting between the sliding rails 310 and the vertical members 302 and provision for water supply and waste. In this fashion as previously described, two such washing modules might be located in the same cavity in the under and over configuration, or side by side in adjacent cavities.

#### Drawer Closure

In a washing machine as proposed here, where the wash chambers are mounted as sliding drawers, the closing of the chambers prior to commencement of the wash cycle is more complicated than with conventional front loading or above-bench top loading machines. It is undesirable to have users manually close a door to seal the open-topped wash chamber prior to pushing the extended 'drawer' back into the cabinet. It is preferable to have a closure which is actuated by the action of retracting the wash chamber back into the cabinet.

In Figure 1, a rigid closure or lid 217 is diagrammatically shown which is mounted in the top of the cabinet 203 for closing the open top of wash chamber 201. Closure can be effected by mounting the lid in such a way as to allow it to be mechanically forced downwardly on to the rim of wash chamber 1 as the chamber is retracted into cabinet 203. One means for achieving this type of sealing action is disclosed in WO 93/12706, which utilises mechanical linkages in a parallelogram fashion to seal the drawer during the last portion of travel of the wash chamber. The present invention in contrast, with no cabinet or chassis, thus provides alternative solutions.

In the preferred embodiment of the present invention (Figures 9-11) the lid 320 forms part of a bracket 326, which effectively loops over the top of the drawer when closed, and mounts at its base to the base module 300. The drawer lid 320 is shown in Figures 9 and 10 in a "closed position", whereby the gasket 322 is compressed between the lid 320 and the rim 324 of the wash chamber 308. In Figure 12 showing a cutaway side view, the lid 320 is shown in a raised position whereby the gasket 322 is unengaged with the wash chamber so that the wash

chamber 308 can be freely withdrawn from the cavity 310.

The gasket 322, shown in more detail in Figure 39, is effectively "L" shaped in cross section. There are two sealing edges, one edge 402 at the end the first flange 408 (attached to the lid about in a groove 406 running around the periphery thereof), and a second edge 404 at the end the second flange 410 (attached to the end of the first flange). When the lid is properly closed both flanges are deformed, and each of the sealing edges bears an approximately equal load. This provides an advantage over prior art dual lip seals, the respective lips of which generally do not bear equal loads, and therefore have unequal sealing effectiveness. While in the preferred embodiment the gasket is L shaped in cross section, it will still be effective if the angle of the first flange  $\alpha$  is less than  $90^\circ$  and the angle of the second flange  $\beta$  is greater than  $90^\circ$  but less than  $180^\circ$ .

In a further improvement, the closure includes a moisture hood (not shown) around its periphery to ensure that when the drawer is withdrawn any excess steam is prevented from escaping into the cavity. As this cavity will typically be constructed from timber, even small amounts of residual moisture, would be detrimental. The hood might include an external vent to the front, so as to direct the steam out of the cavity.

Alternatively, as shown in Figure 11, the lid 330 might be mounted separately within the cavity 332, individually from the base module 334 and wash chamber 336.

#### Closure Mechanism

As already described, it is preferable that the mechanical act of closing the drawer should activate the drawer closure. In the preferred embodiment of the present invention this is achieved by a mechanical arrangement connecting the closure to the base module.

Referring now to Figure 27 and 28 a first such mechanical arrangement, is illustrated which secures the closure on the wash chamber when closed. A hinged link or arm 350, (one either side of the base module), is hingeably attached at one end 352 to the base module (300, Figure 9), and hingeably attached at the other end 354 to the yoke 326. The yoke 326 is independent of the base module, and loops over the top of the wash chamber (308, Figure 9) when fully retracted. The closure 320 is attached to the underside of the uppermost portions 356 of the yoke 326. A spring 358, (one either side of the base module), is hingeably attached at one end 360 to the base module (at a different point to where the hinged member is attached), and at the other end 354 is hingeably attached to the yoke 326 (at the same point at which the hinged arm is attached).

At two points on the sides of the wash chamber, are abutments 362,366 which are designed to cooperate with matching abutments 364,368 on the yoke. When the wash chamber is slid into the retracted position, the chamber abutments 362,366 provide a horizontal force on the yoke abutments 364,368. The action, (370, Figure 28) of the hinged members 350, converts this horizontal force into a combined vertical component and horizontal component

force. This results in a downward and inward movement of the closure, as the retraction of the wash chamber is completed. In this fashion to a large extent as the lid comes down the gasket meets the outer lip of the wash chamber without substantial slippage, which would adversely affect sealing.

5           When the chamber is fully retracted the lower chamber abutment 366, becomes fully engaged with the yoke. As the chamber is slid inwardly, the yoke moves downwards, such that a further abutment 369 on the yoke, moves into a position behind the lower chamber abutment 366. Thus when the chamber is to be withdrawn the lower chamber abutment 366 acts on the further abutment 369, to force the yoke outwards. The action of the hinged arm transforms the  
10           outward force on the yoke, to outwards and upwards components, to a point where the lower chamber abutment 366 is unengaged with the further abutment 369 and the chamber may be freely withdrawn.

          A further preferred mechanical arrangement is shown in Figures 30 to 32, which secures the closure on the wash chamber when closed. Again the closure 420 is suspended on  
15           the underside of the uppermost portion of the yoke 422. A roller or cam-follower 424, is attached at the base of the yoke 422, and during the opening and closing process, interacts with a cam 426 attached to the base module. A torsion spring 428 is connected between the base module 421 and the cam-follower 424, providing a primarily downward force on the yoke.

          In Figure 31 we see the wash chamber in its retracted position. As previously the  
20           chamber abutments 430 acting on the yoke abutments 432 force the yoke inwards 423, and the spring 428 forces the yoke downwards 425 - the downward slope of the cam surface 434 allowing downward movement as the cam-follower 424 moves inwards. In the fully retracted position, as before the chamber abutment 430 is fully engaged with the yoke - a further abutment 436 now being in a position behind the chamber abutment 430.

25           When the chamber is to be withdrawn the chamber abutment 366 acts on the further abutment 436, to force the yoke outwards. The slope of the surface 434, transforms the outward force on the yoke, to outwards and upwards components, to a point where the chamber abutment 430 is unengaged with the further abutment 436 and the chamber may be freely withdrawn.

30           The arc 438 of the spring 428 is centred about a mid point on the cam surface 434. Thus in the retracted position the spring 428 forces the closure 420 downward onto the chamber. In the withdrawn position, the spring 428 forces the closure 420 upwards clear of the chamber. Thus in both such positions the closure will stay mechanically locked in place until force is applied by the chamber abutment 430.

35           It will be appreciated that while these closure mechanisms have been described with reference to a cabinet-less drawer dishwasher, they are applicable to drawer dishwashers in general.

### Alternative embodiments

With a dishwasher thus described as the present invention, it will be appreciated that a number of methods exist for effecting sealing of the wash chamber. Below are described examples of alternative sealing apparatus designed for use with the present invention so described.

The first of these is illustrated diagrammatically in Figures 20 to 22. In this case a rigid lid 217 is used as previously described, but is fixed in position above the closed wash chamber 201 and fitted with a peripheral inflatable gasket 18 located in vertical registration with rim 19 of wash chamber 201. In this embodiment when the wash chamber is fully retracted, member 18 is inflated as shown in Figure 21 to sealably engage with rim 19. In this case member 18 is the sealing member, but an equally suitable alternative would be to inflate a sealing member carrier 250 interposed between the lid and sealing member 251 as shown in Figure 38.

A practical realisation of this embodiment is shown in more detail in Figure 22. Wash chamber 201 is formed with a flanged rim 19 which in use provides a seat for inflatable gasket 18. In Figure 22 the wash tub 201 is indicated as being fully retracted with gasket 18 being inflated so as to sealably engage rim 19.

A rigid lid 217 is as described in the preferred embodiment attached to a bracket 400 which is mounted to the stationary carriage of the sliding rails. Lid 217 is essentially fixed in relation to the under bench cavity. Provided at the periphery of its underside is a channel 31 for retaining gasket 18.

Gasket 18 is moulded from an elastic plastics material and is formed as an indefinite length. A ribbed extension 32 is integrally moulded on the top surface of the gasket to engage in channel 31 in lid 217 to thereby engage the gasket to the lid.

A further alternative is shown in Figure 14 where lid 217 and the rim 19 of wash chamber 201 are provided with complementary inclined edges along the sides thereof. A resilient sealing member is disposed about the periphery of lid 17. When wash chamber 201 is fully retracted in cabinet 203 it seals against lid 17 by virtue of the wedging action that results as a result of the fore-aft inclinations of the lid and chamber rim.

In another alternative configuration (not shown) a flat rigid lid is provided with a peripheral flexible gasket which cooperates with means on the wash chamber rim so that positive sealing between the lid and wash chamber is achieved by a pure sliding action when the chamber is retracted.

Figures 15 to 17 show alternative embodiments where instead of the use of a rigid lid, a flexible closure is used. In Figure 15 a curtain type closure 24 is fixed along edge 25 to the rear segment 26 of wash chamber rim 19. Curtain 24 is retractably stored on a spring-loaded roller 27 mounted in the top front of the dishwasher cavity. When wash chamber 201 is withdrawn, curtain 24 is taken up on roller 25 whereas when the wash chamber is retracted,

curtain 24 is played off roller 25 to fully cover the open top of the wash chamber 201.

Figure 16 shows a flexible closure 27 provided with a concertina type configuration and mounted in slides provided in the top sides of the dishwasher cavity. When the wash chamber 201 is withdrawn as shown in Figure 17, closure 27 folds up due to concertina action whereas when the wash chamber is retracted as shown in Figure 16 a closure 27 is opened out so as to lie flat along the top of the wash chamber.

In addition to using a moving or expanding sealing member onto the top of the wash chamber when it is retracted into the cabinet a separate seal support carrier may be interposed between the periphery of the lid and the sealing member with closure being achieved by lowering the support carrier. This is shown in Figure 39, where a seal support carrier 252 is attached to lid 217 by an expandable skirt 253. A variety of actuator means giving reciprocal motion can be used to move the seal carrier.

An alternative flexible closure arrangement is shown in Figure 42. An endless belt 260 mounted on rollers 261 having a width equally to the width of the wash chamber and spacing between rollers approximately equal to the length of the wash chamber covers the top of the chamber when it is fully retracted.

The rollers 261 are mounted at a fixed height in the top of the dishwasher cavity. The top edge of the rear wall 262 of the chamber is fixed to the belt 260 so that it is rotated and given the same linear motion as the chamber as it is slid closed. A pressure pad 263 may be used to ensure sealing of the belt against the wash chamber and the belt may be stiffened by a series of spaced apart transverse battens.

In the embodiments so far described the closure 217 is essentially fixed in the vertical direction within the cavity, whether rigid or flexible. In the following embodiments the closure is moved downwards by various means to sealably close the open top of wash chamber 201.

A first such embodiment is shown in Figures 23 and 24. Here a peripheral resilient sealing member 20 is disposed on the underside of lid 217 while an inflatable annular member 21 is used to force lid 217 downward in a vertical direction to seal against rim 19 of the wash chamber as shown in Figure 19.

A further embodiment is shown in Figures 25 and 26. Here lid 217 is mounted in the top of the cavity so as to be movable in a vertical direction from the position shown in Figure 25 to the position shown in Figure 26. Sealing is achieved by providing flange configurations around the edge of the lid and in the top of the wash chamber wall so that when closed, as shown in Figure 26, an impassable labyrinthic fluid path 22 is formed to thereby effectively seal the wash chamber. The lid and wash chamber flange configuration form a pressure equalisation chamber which ensures wash liquid does not escape. This configuration of lid can also be used in a fixed lid mode if the rear wall of the wash chamber is of reduced height to provide clearance for the lid flanges as it is slid into the closed position.

In addition to the labyrinthic path configuration sealing may be assisted by flexible deformable sliding members 264 shown in Figure 43 and/or by a linear brush member 265 shown in Figure 44.

5 An alternative means of raising and lowering a rigid lid is shown in Figure 40. Compression springs 253 apply a lifting force to lid 217 and maintain it in a normally open position. Tension springs 254 are used to apply a closing force to the lid when the wash chamber is fully retracted. Tension is applied by a roller 255 attached to one end of the spring travelling over cam or ramp 256 prior to full retraction of the wash chamber. A latch 257 maintains tension in the spring after the roller has passed over cam 256. This is released when  
10 it is later desired to raise the lid. A second latch 258 takes the downward force due to the extended spring 254 until the wash chamber is fully retracted whereupon it releases member 259 to allow a closing (lowering force) to be applied to lid 217.

Another mechanism for raising and lowering a rigid lid is shown in Figures 45 to 47. A cam and cam follower arrangement is used as follows. Lid 217 is mounted in the top of the cavity on compression springs 270 although restricted against horizontal movement. Wash  
15 chamber 201 is provided with cam surfaces 266 and 267 on the outside of each side wall which engage corresponding rollers 268 and 269 as the chamber is moved horizontally to the retracted position. Surface 266 first contacts roller 268 and causes the front of lid 217 to lift as shown in Figure 46. Similarly surface 267 contacts roller 269 and lifts the rear end of lid 217 as the  
20 wash chamber is retracted further. At the end of horizontal travel (Figure 47) the rollers move down into the semi-circular portions of cam surfaces 266 and 267 under the influence of springs 270 to lower the lid 217 onto the top of the wash chamber and close it.

This cam and cam follower technique can be used with the wedged configuration of lid and wash chamber walls which was shown in Figure 14. This can assist in achieving an  
25 increased sealing force by providing a vertical force component in addition to the horizontal component caused by pushing the wash chamber into the cavity. A cam and cam follower arrangement can also be used to raise and lower the rear end of the lid in constructions where the front of the lid is pivoted about a transverse horizontal axle at a fixed height in the upper front of the cavity.

## CLAIMS

1. A washing appliance adapted to be mounted in a cavity comprising:

(a) transport means adapted to mount to at least one inner face of said cavity,

5 (b) a wash system slidably mounted to said transport means whereby in use said wash system may be withdrawn horizontally out of said cavity for access thereto, said wash system including:

(i) an open top wash chamber adapted to accommodate items to be washed and within which wash liquid is circulated, said wash chamber having a top peripheral rim,

10 (ii) means for introducing and circulating wash liquid within said chamber,

(iii) means for evacuating wash liquid from said chamber,

(c) a wash chamber closure adapted to be mounted within said cavity, which closure covers the open top of said wash chamber on retraction of the wash chamber into said cavity, and

15 (d) said closure having peripheral means which cooperate with the top of said chamber in the vicinity of said rim thereby preventing the egress of wash liquid from the wash chamber, when it is retracted into said cabinet.

2. A washing appliance as claimed in claim 1 wherein said transport means includes  
20 fastening means adapted to attach to at least one inner face of said cavity.

3. A washing appliance as claimed in claims 1 or 2, wherein said closure is a rigid lid.

4. A washing appliance as claimed in any one of claims 1 to 3, wherein said peripheral  
25 means comprise a sealing member disposed about the periphery of the under side of said lid to engage with the rim of said chamber when said wash chamber is retracted into said cabinet.

5. A washing appliance as claimed in any one of claims 1 to 4, wherein said washing  
30 appliance further comprises a cam arrangement including a cam surface adapted to connect to a stationary point within said cavity, a cam-follower connected to said closure and adapted to interact with said cam surface, and an elastically deformable member adapted to be compressed between said cam-follower and a stationary point within said cavity, to provide the closure  
35 with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber within said cabinet and on initial withdrawal of said wash chamber from within said cavity with

continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

5           6.     A washing appliance as claimed in any one of claims 1 to 4 wherein said washing appliance further comprises a linkage arrangement including at least one hinged link member, one end of each member being hingably connected to said transport means and the other end of each member being hingably connected to said closure, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber within said cavity and on initial withdrawal of said wash chamber from within said cavity with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

10           7.     A washing appliance as claimed in any one of claims 1 to 6 wherein said lid is mounted in a fixed position under the top of the cabinet aligned so as to cover the top of the wash chamber when the latter is retracted, said wash chamber rim is uniformly inclined to be higher at the front than at the back, said lid has a peripheral flange which is correspondingly inclined in depth to be higher at the back than at the front, a resilient sealing member is disposed around the periphery of the underside of said lid, and the vertical location of said lid is such that when said wash chamber is fully retracted the sealing member is engaged and compressed by the rim of said wash chamber.

25           8.     A washing appliance as claimed in claim 1 wherein said closure is a flexible member which is extended on retraction of said wash chamber to cover the open top of said chamber and is retracted on withdrawal of said chamber to uncover the open top of said chamber.

30           9.     A washing appliance as claimed in claim 8 wherein said flexible member is a flexible sheet fastened at one end to a distal portion of said rim and fixed on a spring-loaded roller at the other end, said roller mounted in the top of said cabinet near the front opening in the cabinet and above a proximal portion of said rim, said roller taking up substantially all of the area of said flexible member when the chamber is withdrawn.

35           10.    A washing appliance as claimed in claim 8 wherein said flexible member is of

concertina configuration and is fastened at one end to a distal portion of said rim and fixed at the other end to the top of the front opening of said cabinet.

11. A washing appliance comprising:

(a) a wash system adapted to be slidable mounted in such a manner that it may be withdrawn horizontally for access thereto, said wash system including:

(i) an open top wash chamber adapted to accommodate items to be washed and within which wash liquid is circulated, said wash chamber having a top peripheral rim,

(ii) means for introducing and circulating wash liquid within said chamber,

(iii) means for evacuating wash liquid from said chamber,

(b) a wash chamber closure, and

(c) a cam arrangement including a cam surface adapted to connect to a stationary point, a cam-follower connected to said closure and adapted to interact with said cam surface, and an elastically deformable member adapted to be compressed between said cam-follower and a stationary point, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber within said cabinet and on initial withdrawal of said wash chamber with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

12. A washing appliance as claimed in claim 11 wherein, when said chamber is fully retracted the entire downward force on said closure is provided by said elastically deformable member.

13. A washing appliance as claimed in claim 12 wherein said elastically deformable member is a torsional spring.

14. A washing appliance comprising:

(a) a wash system adapted to be slidable mounted in such a manner that it may be withdrawn horizontally for access thereto, said wash system including:

(i) an open top wash chamber adapted to accommodate items to be washed and within which wash liquid is circulated, said wash chamber having a top peripheral rim,

- (ii) means for introducing and circulating wash liquid within said chamber,
- (iii) means for evacuating wash liquid from said chamber,

(b) a wash chamber closure, and

(c) a linkage arrangement including at least one hinged link member, one end of each member being adapted to hingably connect to a stationary pivot point and the other end of each member being hingably connected to said closure, to provide the closure with two degrees of freedom such that an inwardly directed force causes said closure to move inwardly and downwardly and an outwardly directed force causes said closure to move outwardly and upwardly, and complementary abutting means provided on said closure and said wash chamber, said means abutting on substantially full retraction of said wash chamber and on initial withdrawal of said wash chamber with continued displacement of said wash chamber after abutment providing respective closing and opening forces to said closure to cause it to close against or open away from said wash chamber opening.

15. A dishwasher constructed according to the washing appliance as claimed in any one of the preceding claims.

16. A gasket for a dishwasher including at least one slidable open top wash chamber and a wash chamber closure for each respective wash chamber, said gasket comprising:

(a) a first downward facing flexible flange having a first distal edge and a first proximate edge, said proximate edge attached to the bottom surface of said closure around the periphery thereof, at a angle of between  $0^{\circ}$  and  $90^{\circ}$ , with respect to said bottom surface, and

(b) a second downward facing flexible flange having a second distal edge and a second proximate edge, said second proximate edge attached to the first distal edge of said first flange at a second angle of between  $90^{\circ}$  and  $180^{\circ}$  concurrent with said first angle,

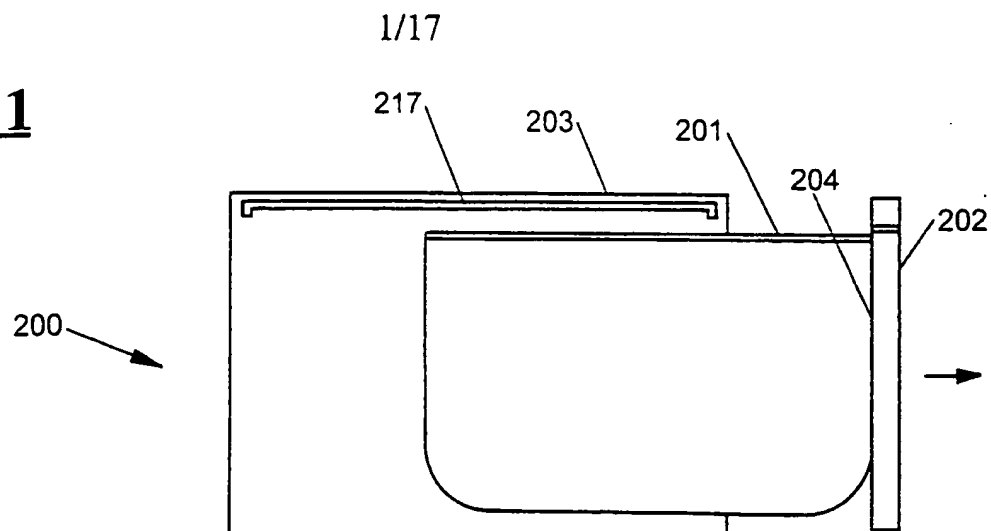
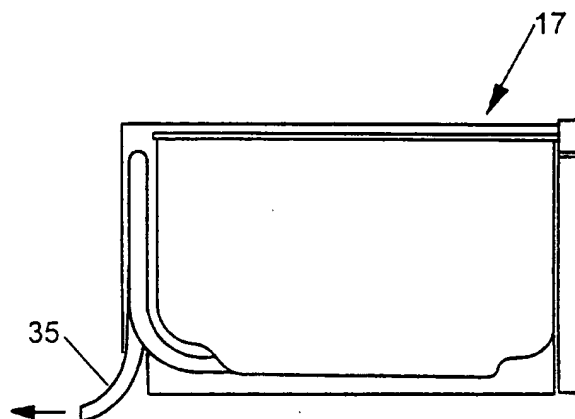
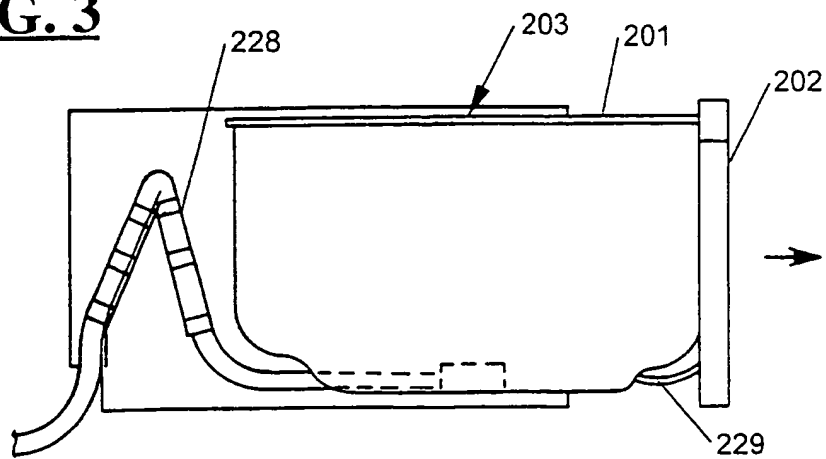
wherein in use when said closure is engaged with the opening of said wash chamber, said first flange and said second flange deform such that when said closure is fully engaged with said opening, said first distal edge and said second distal edge bear substantial similar loads.

17. A gasket as claimed in claim 16 wherein said first angle is  $45^{\circ}$ .

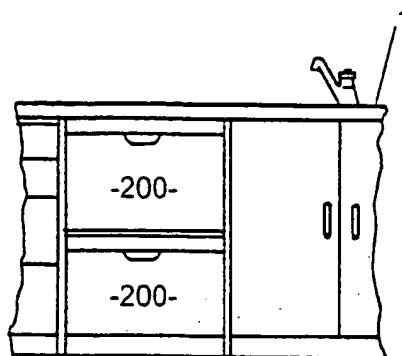
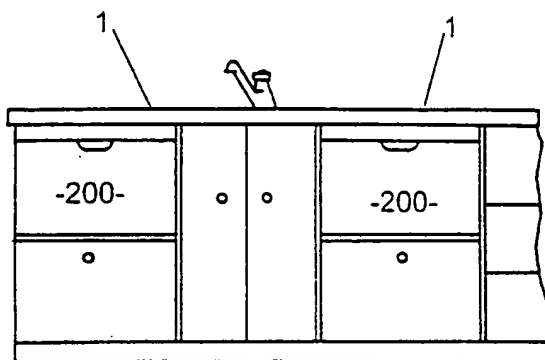
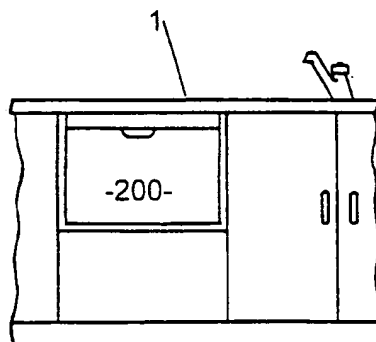
18. A gasket as claimed in claims 16 or 17 wherein said second angle is  $135^{\circ}$ .

19. A gasket as claimed in any one of claims 16 to 18 wherein, said gasket is "L" shaped in cross-section.

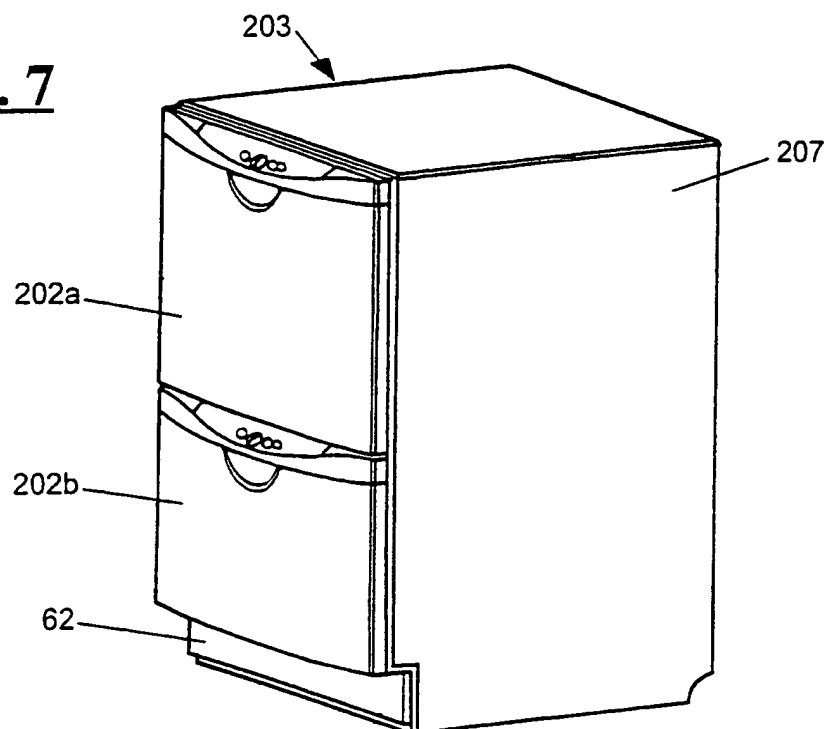
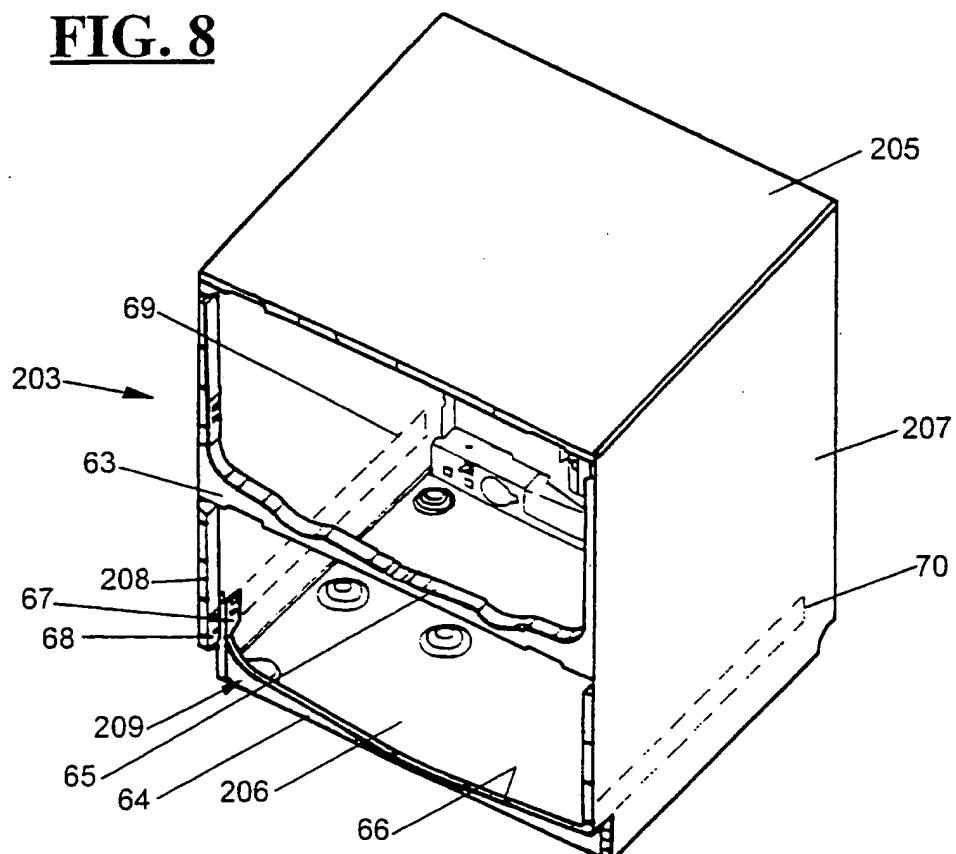
20. A dishwasher as herein described with reference to and as illustrated by the accompanying drawings.

**FIG. 1****FIG. 2****FIG. 3**

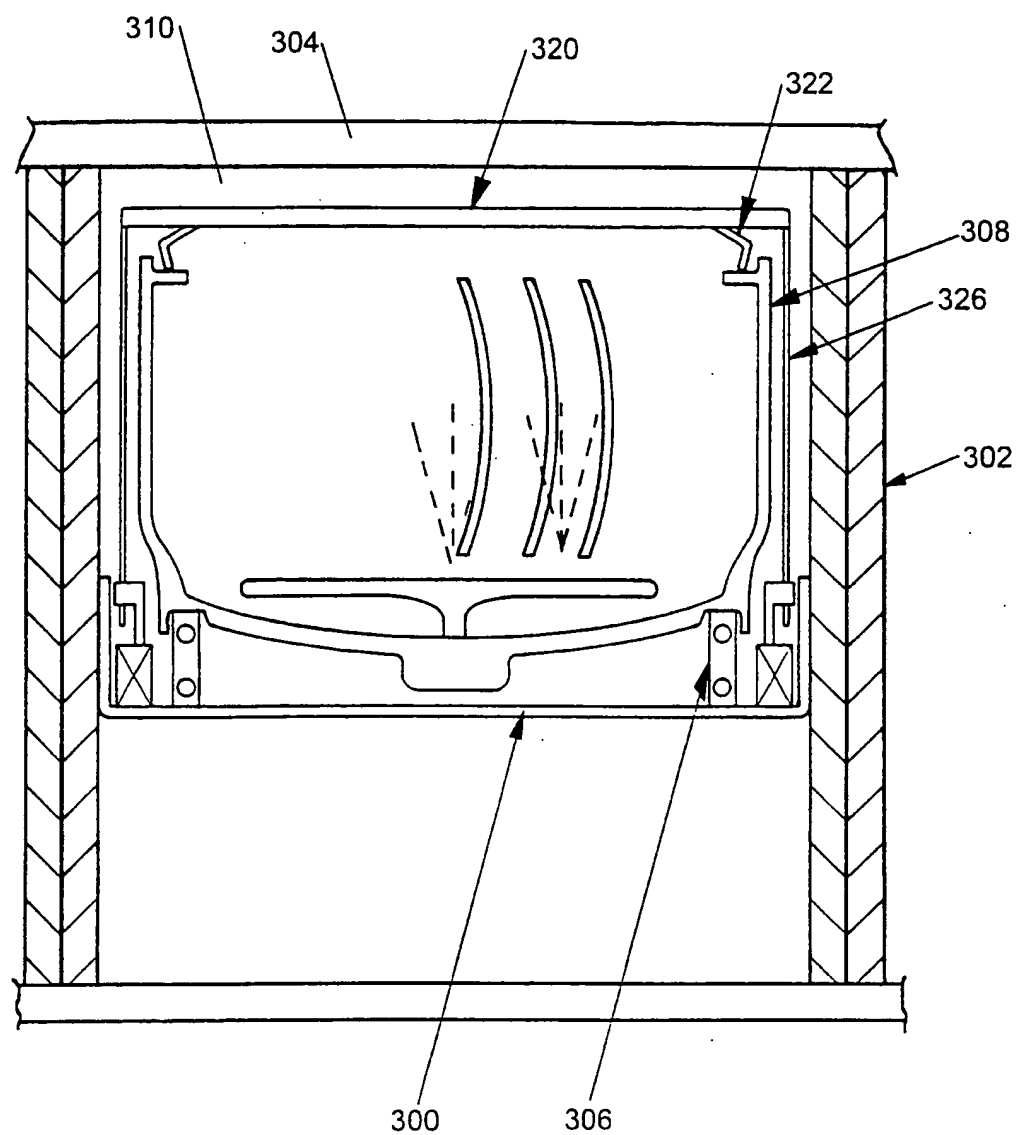
2/17

**FIG. 4****FIG. 5****FIG. 6**

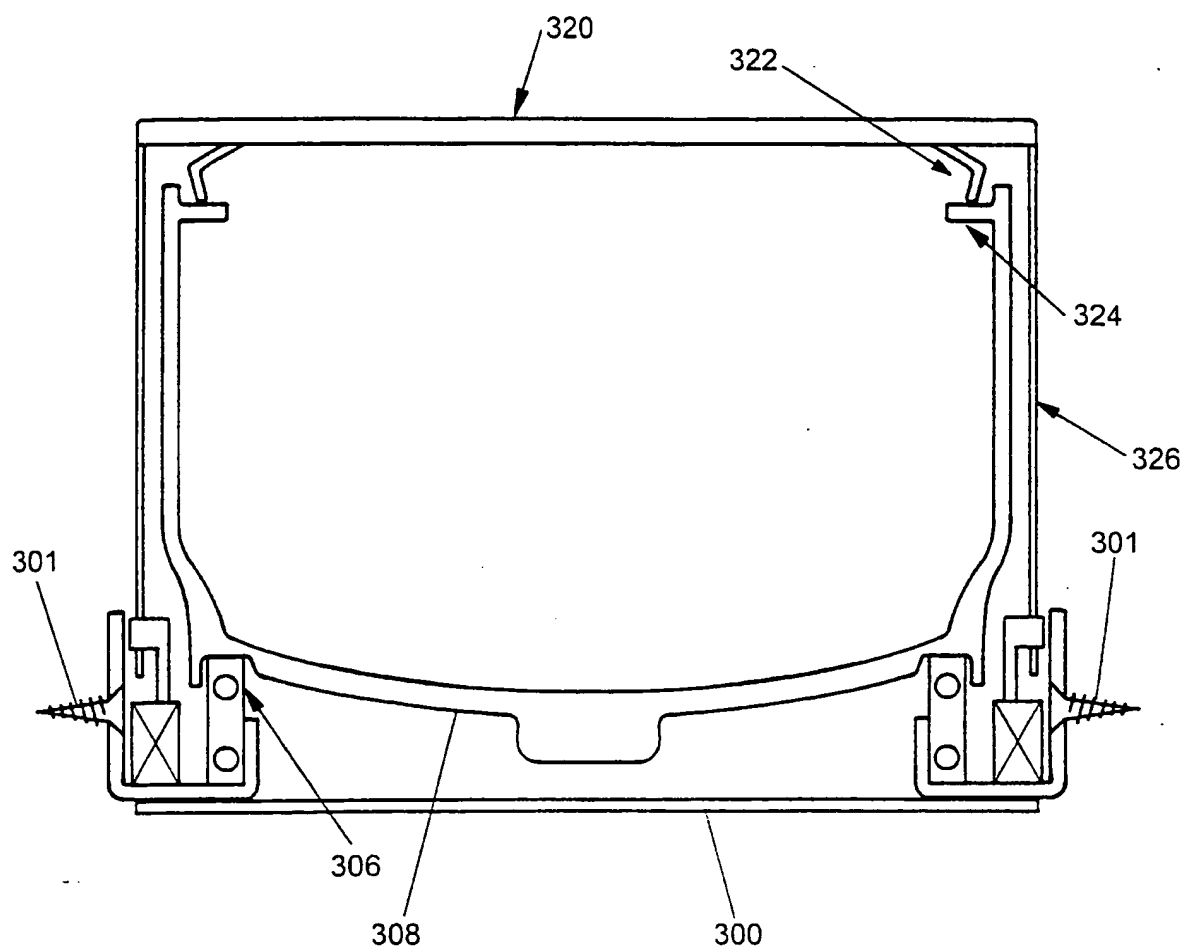
3/17

**FIG. 7****FIG. 8**

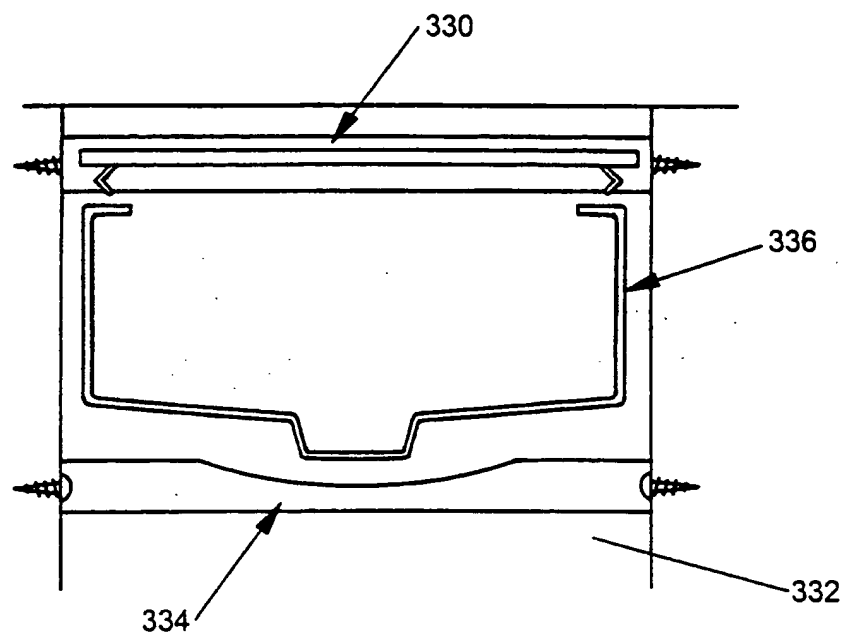
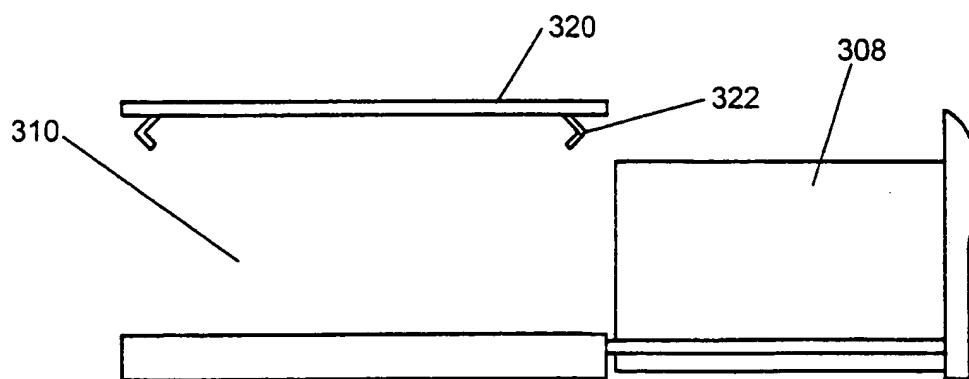
4/17

**FIG.9**

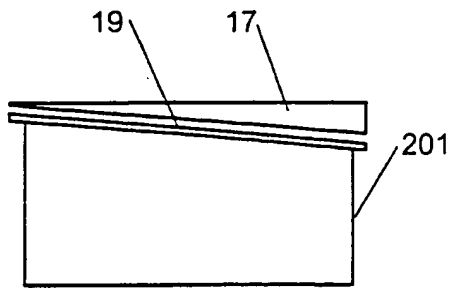
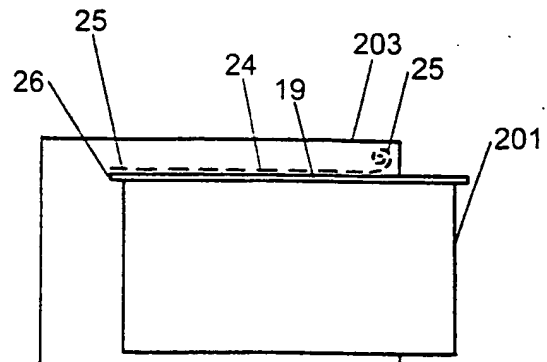
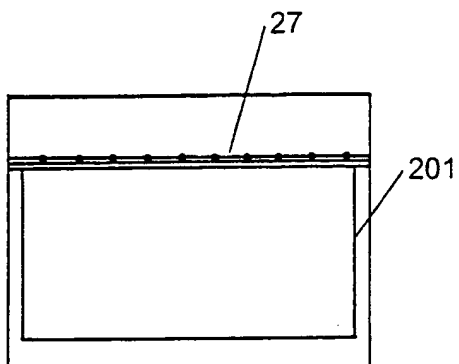
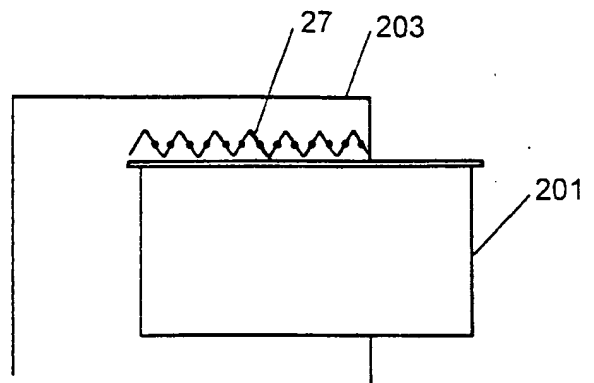


5/17

**FIG. 10**


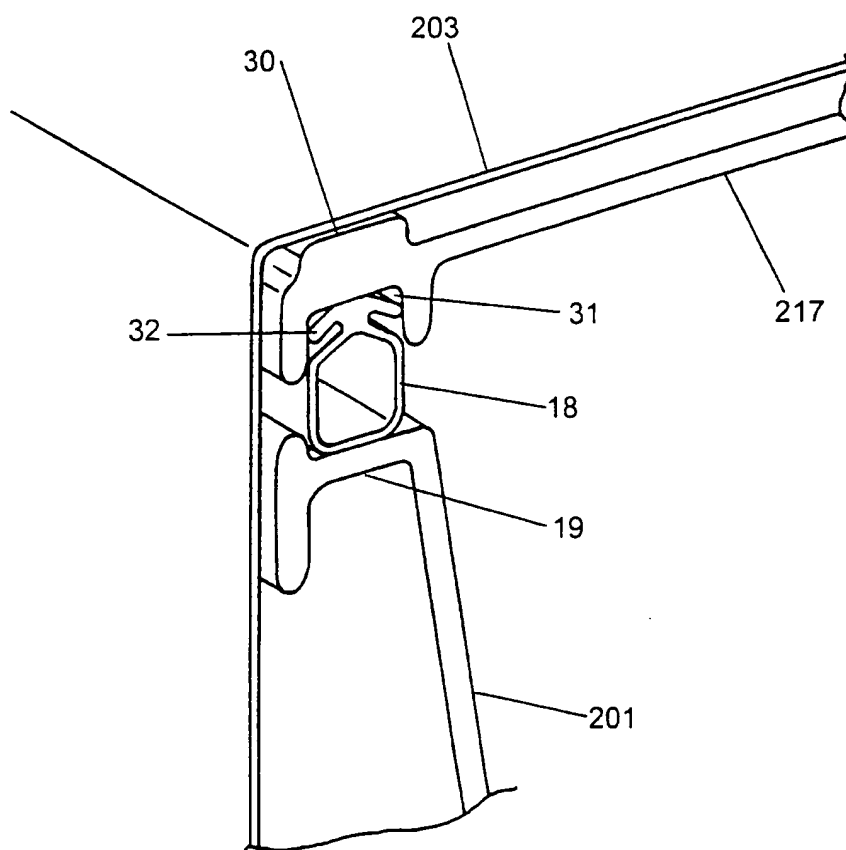
6/12

**FIG. 11****FIG. 12**

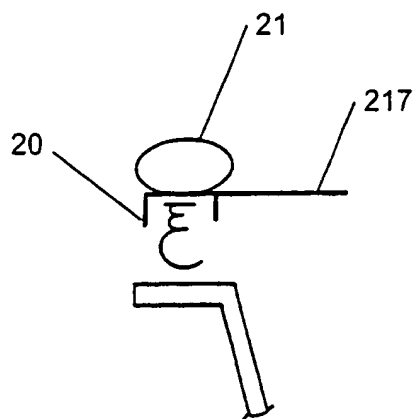
7/17

**FIG. 14****FIG. 15****FIG. 16****FIG. 17****FIG. 18****FIG. 19**

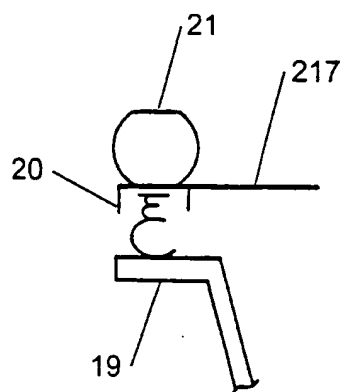
8/17

**FIG. 20****FIG. 21****FIG. 22**

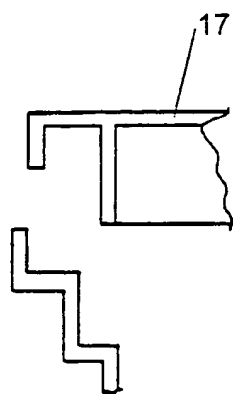
9/17




**FIG. 23**



**FIG. 24**

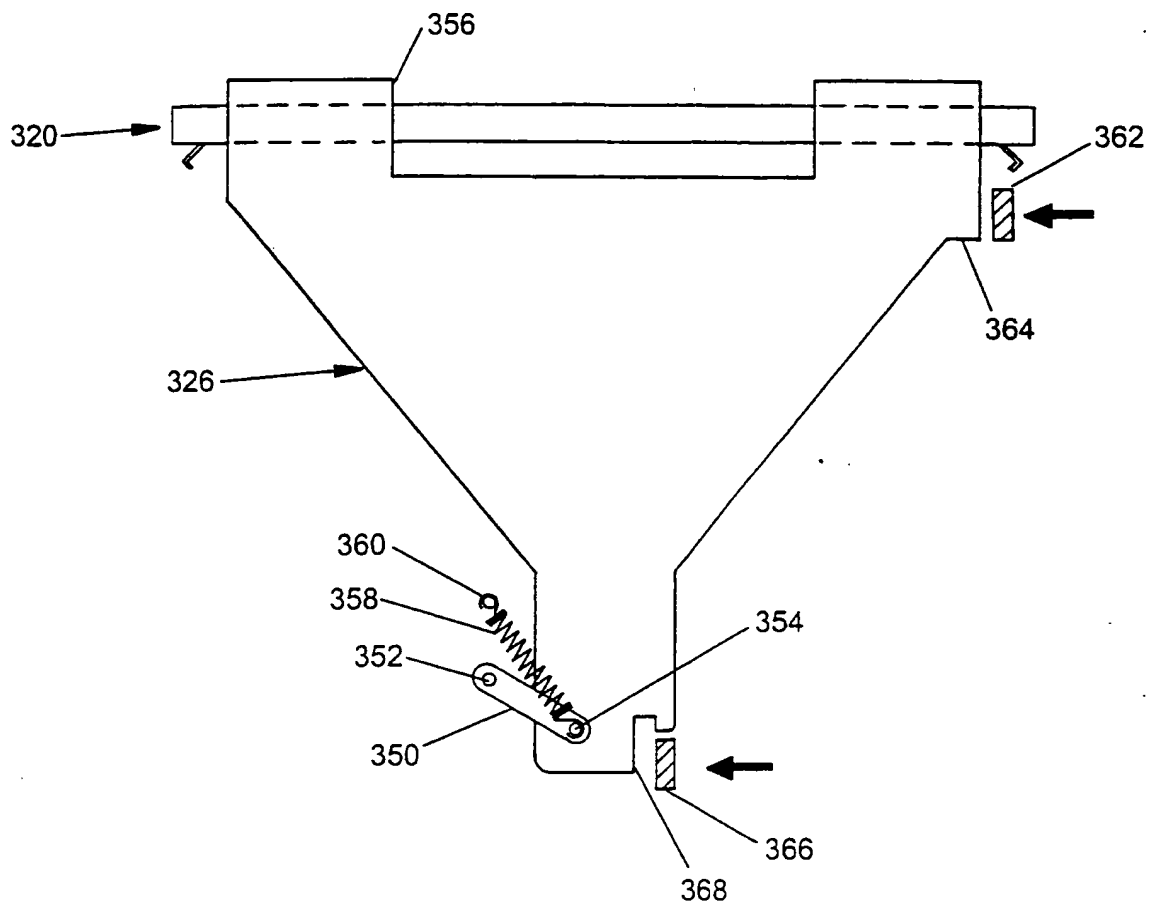


**FIG. 25**

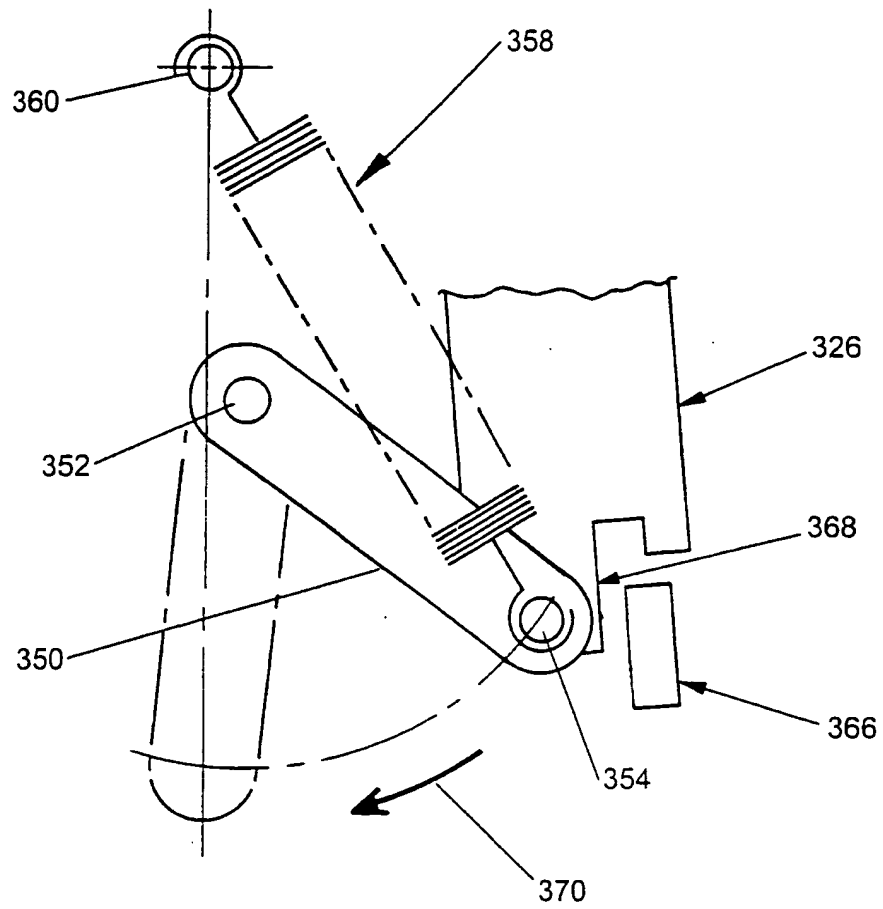


**FIG. 26**

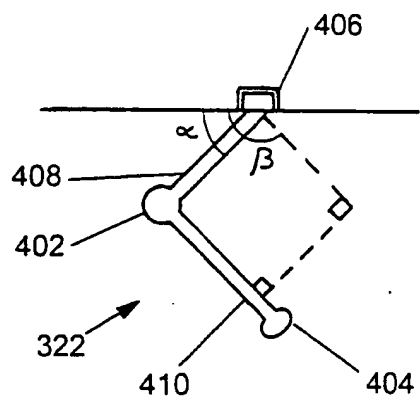
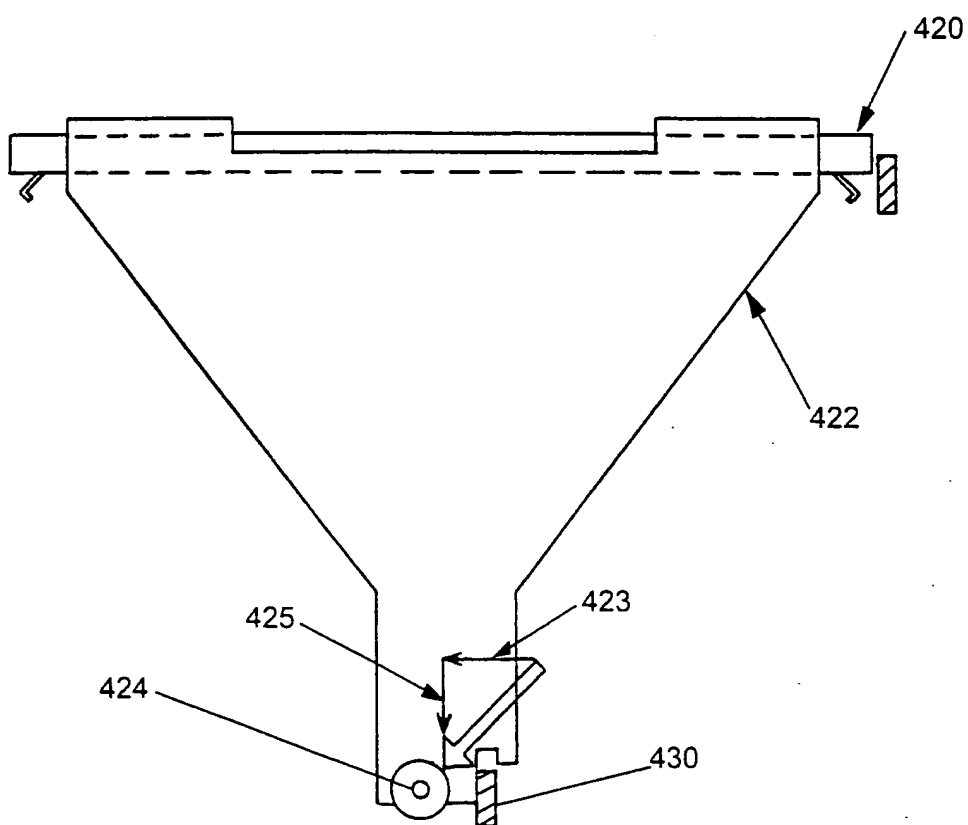
10/17

**FIG. 27**

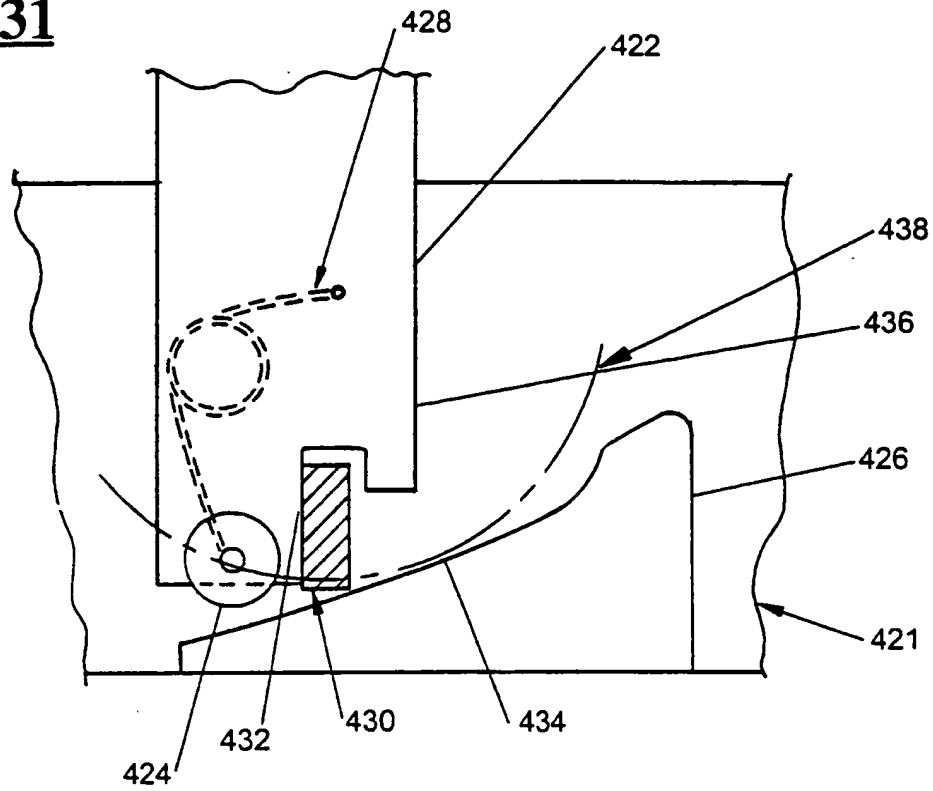
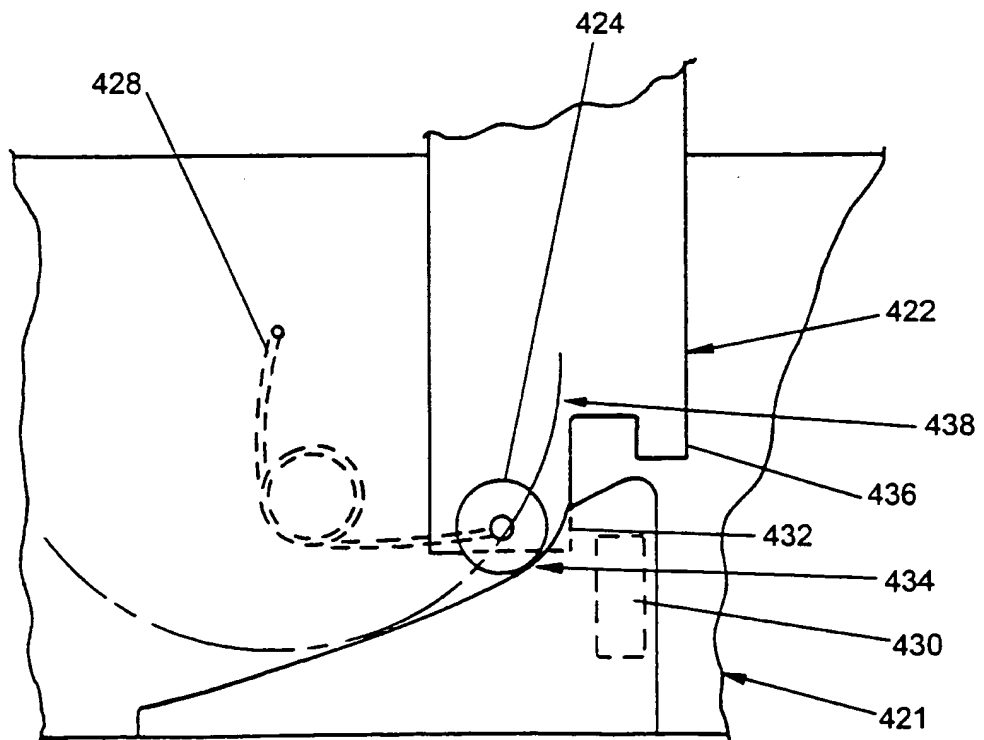
11/17

**FIG. 28**

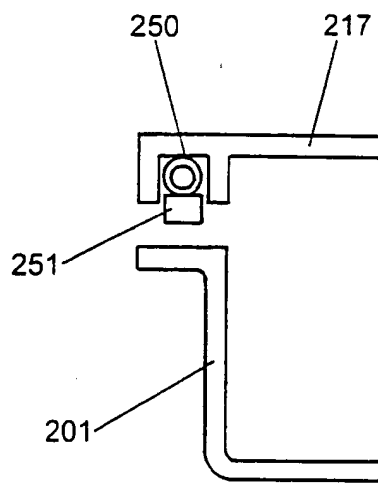
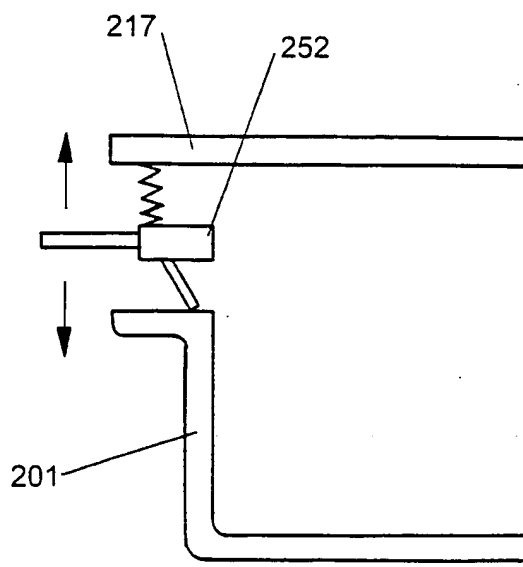
12/17

**FIG. 29****FIG. 30**

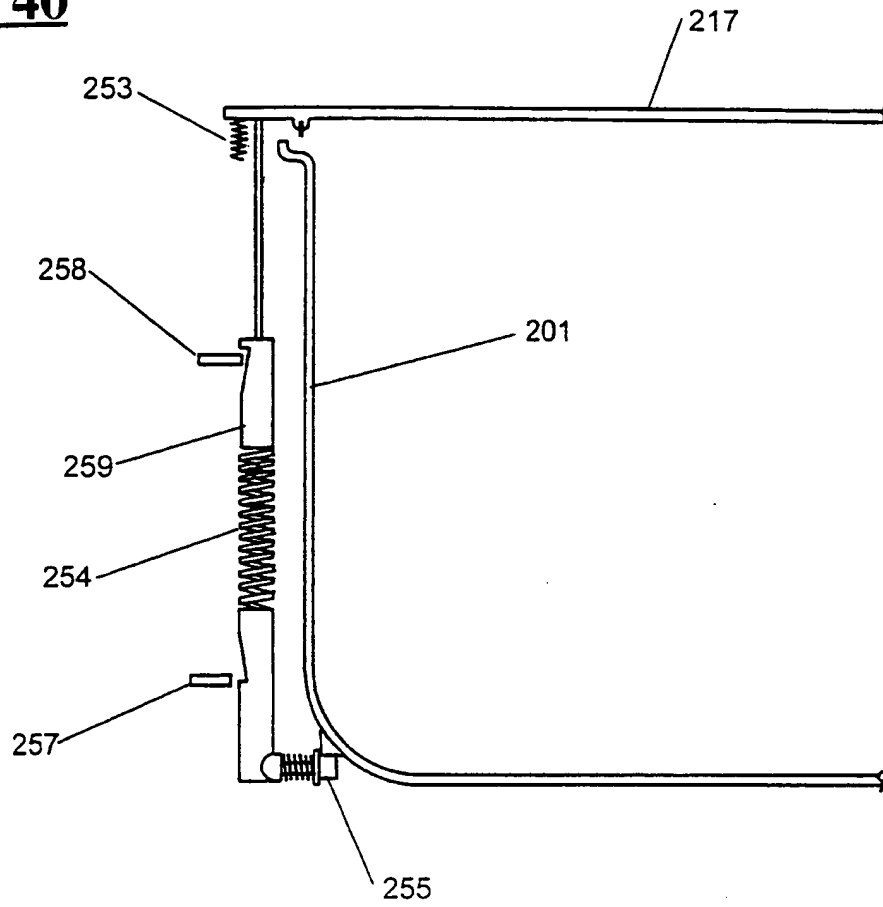
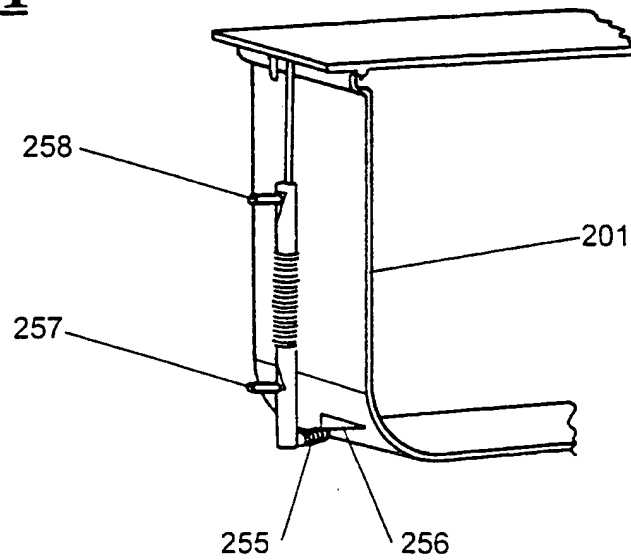
13/17

**FIG. 31****FIG. 32**

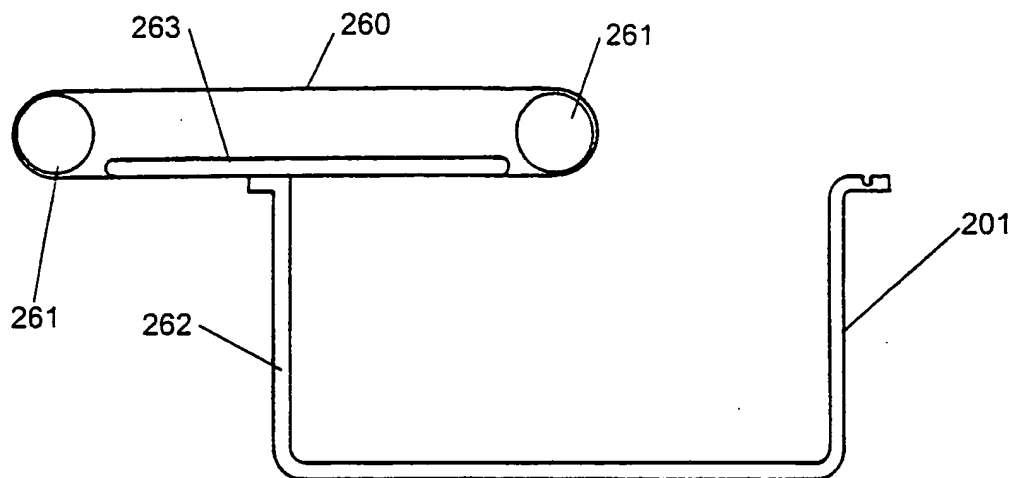
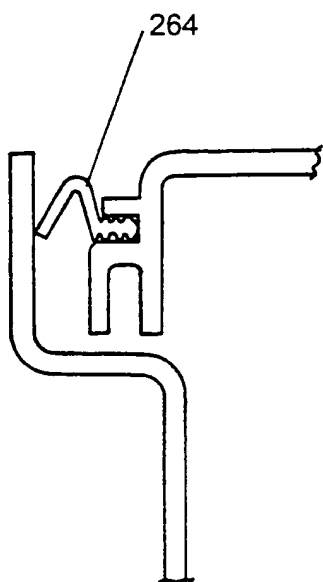
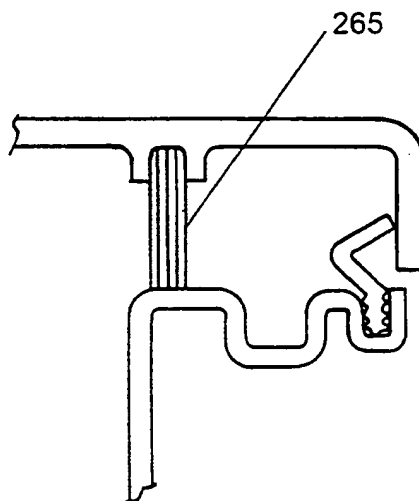
14/17

**FIG. 38****FIG. 39**

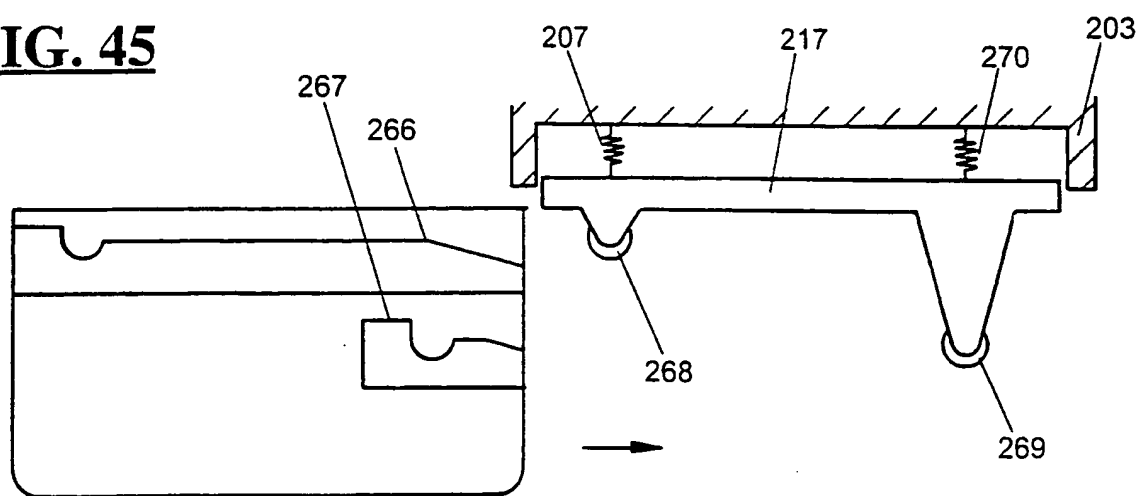
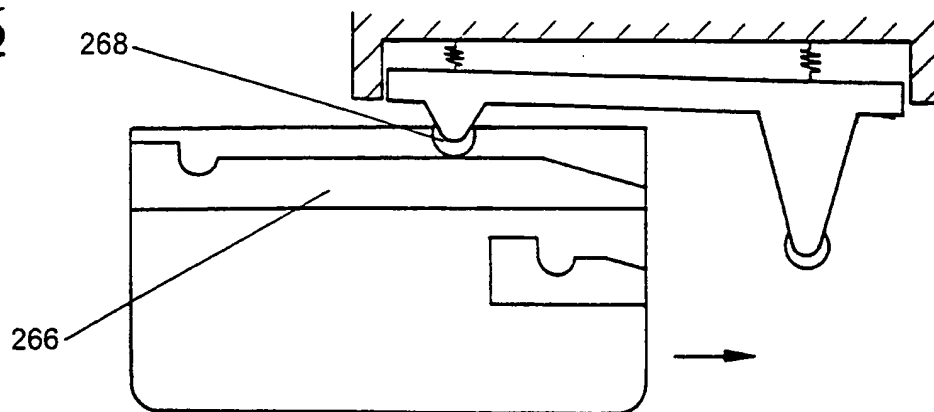
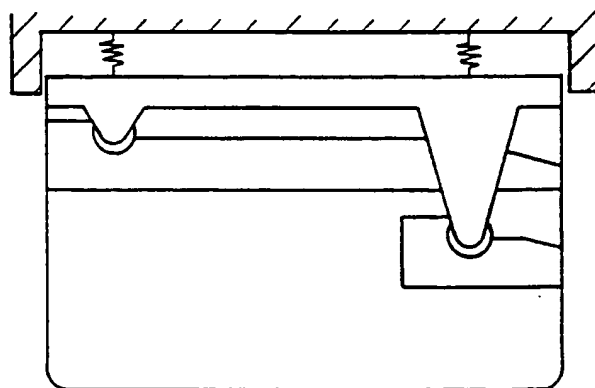
15/17

**FIG. 40****FIG. 41**

16/17

**FIG. 42****FIG. 43****FIG. 44**

17/17

**FIG. 45****FIG. 46****FIG. 47**

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/NZ 00/00193

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int Cl <sup>7</sup> : A47L 15/00, 15/42 F16J 15/32		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) IPC A47L 15/00, 15/42 F16J 15/32		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI: 1. A47L 15/- and closure etc and slide etc 2. A47L 15/- and (gasket or seal) 3. F16J 15/32 and L shape		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98/33426 A (FISHER & PAYKEL LTD) 6 August 1998 Figs 40-47	1-15, 16-19
X	WO 93/12706 A (FISHER & PAYKEL LTD) 8 July 1993 Figs 19-22	1-7, 11-15
X, P	WO 00/16681 A (MAYTAG CORP) 30 March 2000 Figs	1-4, 7
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>		
Date of the actual completion of the international search 18 January 2001		Date of mailing of the international search report 23 January 2001
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No.: (02) 6285 3929		Authorized officer  PETER WARD Telephone No.: (02) 6283 2129

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/NZ 00/00193

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4179307 A (CAU et al) 18 December 1979 Figs	1-4, 7
A	US 4739781 A (CASOLI) 26 April 1988 Figs	1-15
A	DE 3843040 (BOSCH-SIEMIENS HAUSGERATE GMBH) 28 June 1990 Abstract	1-15
X	Derwent Abstract Accession No 98-254495/23 Class X27JP 10080390 A (HTTACHI LTD) 31 March 1998 Abstract	16-19
X	GB 2201886A (BOSCH-SIEMENS HAUSGERATE GMBH) 14 September 1988 Figs 2, 3	16-19
X	US 4303249 A (ILLY) 1 December 1981 Figs	16-19
X	EP 493234 A (CIAPEM) 1 July 1992 Fig 2	16-19
X	FR 2751045 A (GORSKI) 16 January 1998 Figs	16-19
X	DE 3541777 A (BOSCH SIEMENS HAUSGERATE GMBH) 27 May 1987 Figs	16-19

Patent Document Cited in Search Report				Patent Family Member			
WO	98/33426	AU	57835/98	BR	9807044	EP	1021123
		NO	993668	NZ	314155		
WO	93/12706	AU	31747/93	AU	54768/96	AU	54769/96
		AU	54770/96	AU	40999/97	AU	41002/97
		NO	942319	NZ	246218	NZ	286273
		NZ	286275	US	5470142	US	5651382
		US	5709237	US	5743281	US	5755244
US	4179307	DE	2820778Q	IT	1077167	NL	7805008
		US	4739781	AU	54659/86	DE	3607894
		FR	2591454	IT	1187638	JP	61213031
GB	2201886	FR	2612067				
US	4303249	DE	2829066	FR	2429946	GB	2027170
		JP	55010189	SE	7905622		
EP	493234	FR	2670809				
CONTINUED							